




ISO 03 SANDWICH BODIES



- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.

03 P.O. CHECK


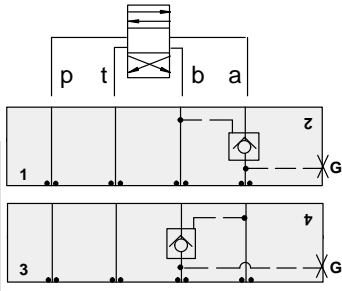


FUNCTION

On A
Pilot from B

On B
Pilot from A

Pilot Operated Check Valves

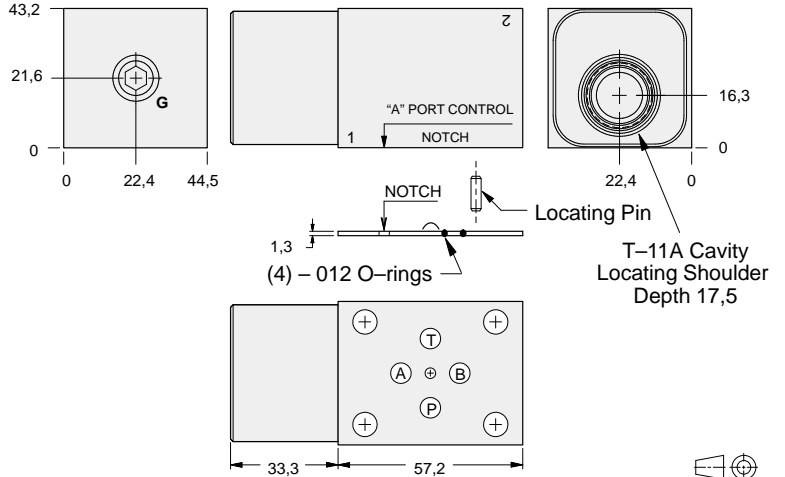

Gauge Port (Plugged)	ALUMINIUM		SG IRON	
	Model Code	List Price	Model Code	List Price
.25 NPTF	EBA		EBA/S	
.25 BSPP	EBA/M		EBA/T	


TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE			
	Pilot-to-Open Check Valve, 3:1 Pilot Ratio		
	CKCB Page 4.16		
OTHER VALVES:			



ISO 03 SANDWICH BODIES





- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.




FUNCTION
 On A
 Pilot from B
 Vent to T

Pilot Operated Check Valves


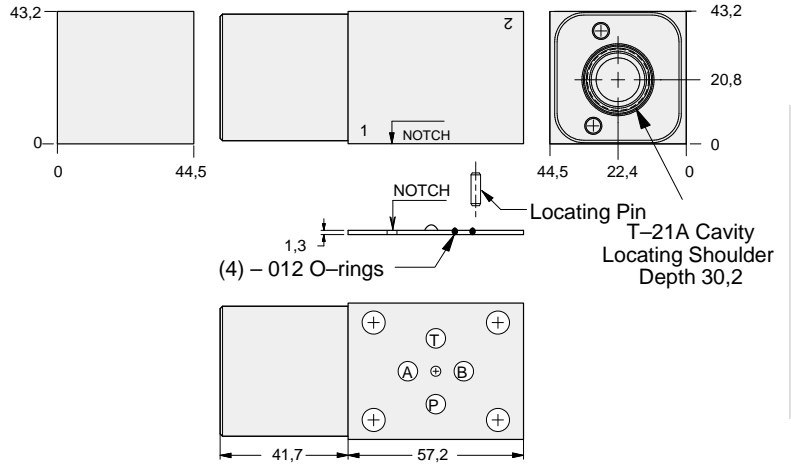


ALUMINIUM		SG IRON	
Model Code	List Price	Model Code	List Price
MBA		MBA/S	



FUNCTION
 On B
 Pilot from A
 Vent to T

Pilot Operated Check Valves

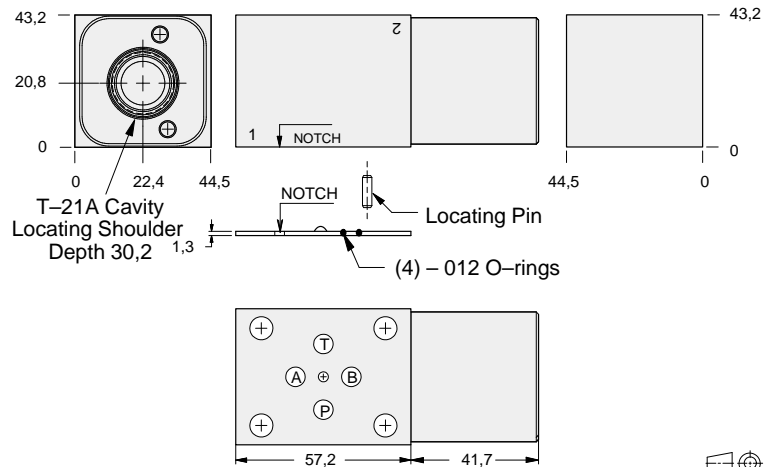

ALUMINIUM		SG IRON	
Model Code	List Price	Part Number	List Price
MBB		MBB/S	

TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE			
	Vented Pilot-to-Open Check Valve, 3:1 Pilot Ratio		
	CVCV Page 4.22		
OTHER VALVES:			




ISO 03 SANDWICH BODIES



- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.



03 P.O. CHECK

Pilot Operated Check Valves

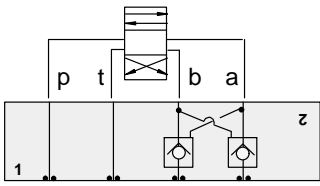

FUNCTION

On A and B
Cross-Piloted

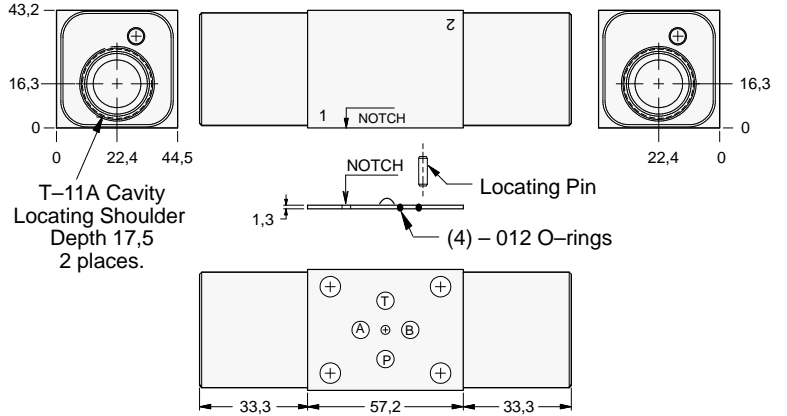

ALUMINIUM		SG IRON	
Model Code	List Price	Model Code	List Price
EBY		EBY/S	

TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE


	Pilot-to-Open Check Valve, 3:1 Pilot Ratio		
	CKCB Page 4.16		
OTHER VALVES:			



ISO 03 SANDWICH BODIES




- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.

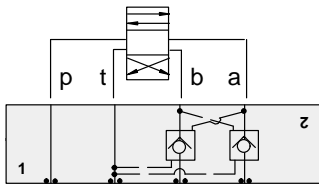


FUNCTION

On **A** and **B**
Cross-Piloted
Vents to **T**

Pilot Operated Check Valves

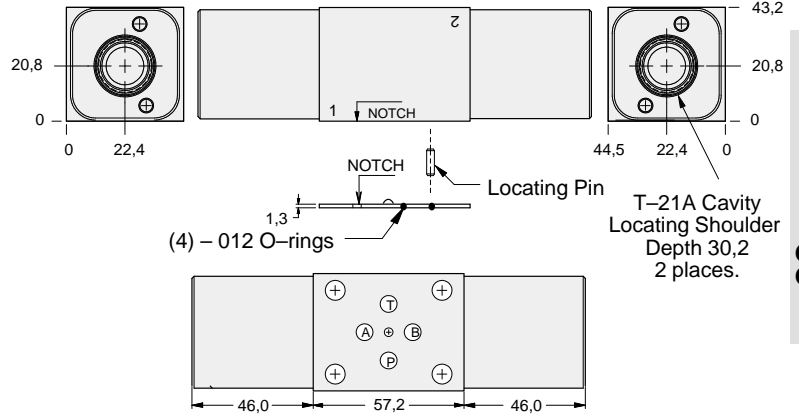

03 P.O. CHECK



ALUMINIUM		SG IRON	
Model Code	List Price	Model Code	List Price
MBY		MBY/S	

TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE			
	Vented Pilot-to-Open Check Valve, 3:1 Pilot Ratio		
	CVCV Page 4.22		
OTHER VALVES:			