





ISO 05 X,Y SANDWICH BODIES




- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.

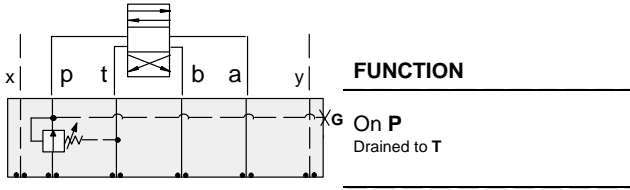

Reducing Valves

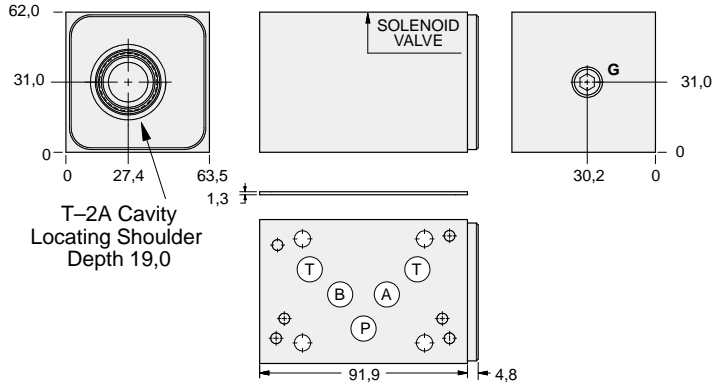

Order Retainer and Seal Kits separately.
(See Page 12.002)



Gauge Port (Plugged)	ALUMINIUM		SG IRON	
	Model Code	List Price	Model Code	List Price
.25 NPTF	BJP		BJP/S	
.25 BSPP	BJP/M		BJP/T	

05xy REDUCING

TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE


	<i>Pilot Operated Reducing Valve</i>		
	PBFB Page 3.06		
	<i>Air Controlled, Pilot Operated Reducing Valve</i>		
	PBFC Page 3.08		
OTHER VALVES:			




ISO 05 X,Y SANDWICH BODIES




- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.

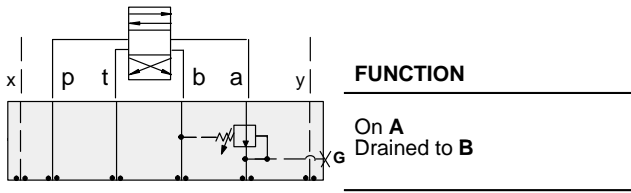

Reducing Valves

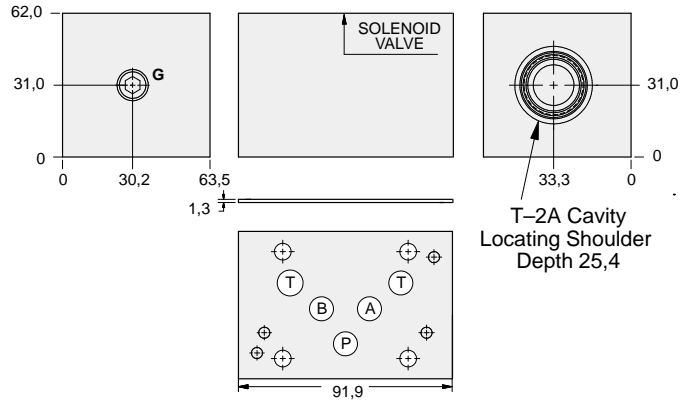

Order Retainer and Seal Kits separately.
(See Page 12.002)



Gauge Port (Plugged)	ALUMINIUM		SG IRON	
	Model Code	List Price	Model Code	List Price
.25 NPTF	BJA		BJA/S	
.25 BSPP	BJA/M		BJA/T	


TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE			
	<i>Pilot Operated Reducing Valve</i>		
	PBFB Page 3.06		
OTHER VALVES:			



ISO 05 X,Y SANDWICH BODIES




- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.




FUNCTION

On A Drain to T
Reverse FF Check

Reducing Valves

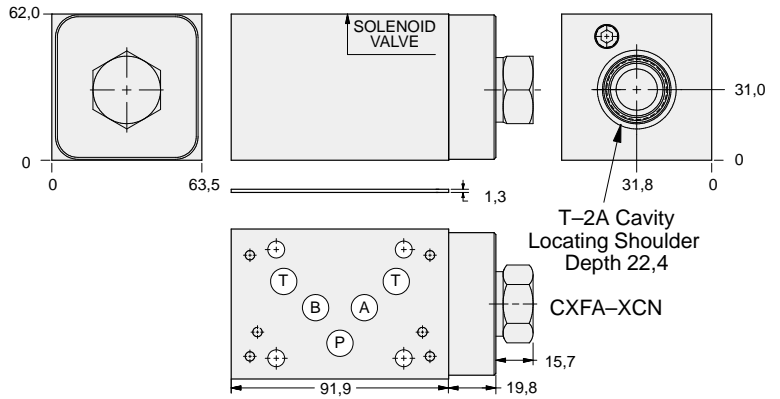


Order Retainer and Seal Kits separately.
(See Page 12.002)



ALUMINIUM		SG IRON	
Model Code	List Price	Model Code	List Price
BJ2		BJ2/S	


05xy REDUCING




FUNCTION

On B Drain to T
Reverse FF Check

Reducing Valves

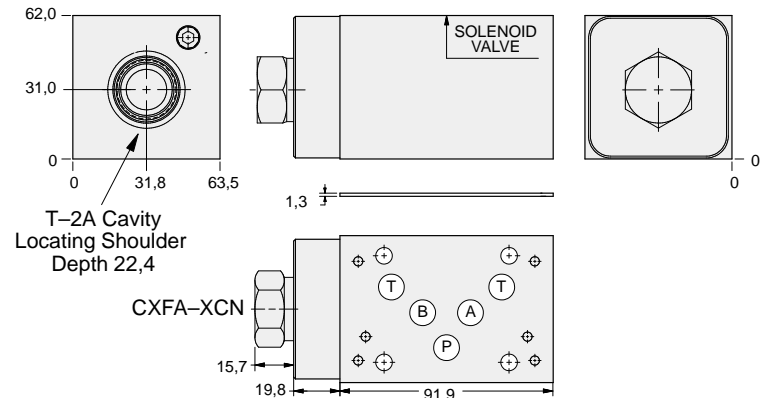

Order Retainer and Seal Kits separately.
(See Page 12.002)



ALUMINIUM		SG IRON	
Model Code	List Price	Part Number	List Price
BJ3		BJ3/S	

TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE


	Pilot Operated Reducing Valve		
	PBFB Page 3.06		
	Air Controlled, Pilot Operated Reducing/Relieving Valve		
	PBFC Page 3.08		
OTHER VALVES:			




ISO 05 X,Y SANDWICH BODIES




- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.

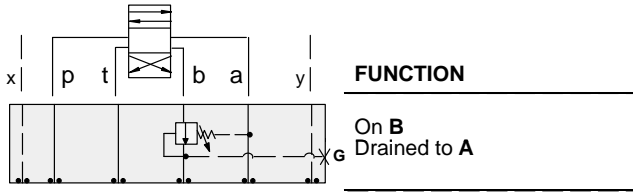

Reducing Valves

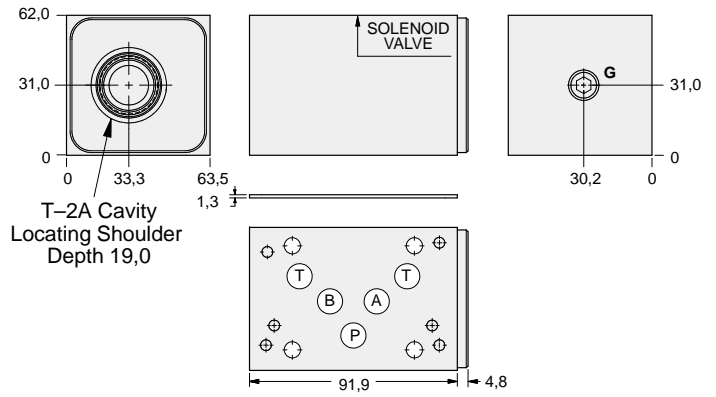

Order Retainer and Seal Kits separately.
(See Page 12.002)



Gauge Port (Plugged)	ALUMINIUM		SG IRON	
	Model Code	List Price	Model Code	List Price
.25 NPTF	BJB		BJB/S	
.25 BSPP	BJB/M		BJB/T	




TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE			
	Pilot Operated Reducing Valve		
	PBFB Page 3.06		
OTHER VALVES:			



ISO 05 X,Y SANDWICH BODIES




- Aluminium rated to 210 bar and SG Iron rated to 350 bar.
- See page viii for ordering cartridge/body and seals. Pressure ratings, material specifications on page xiv.




FUNCTION

On **A** and **B**
Drains to Opposite Port

Reducing Valves

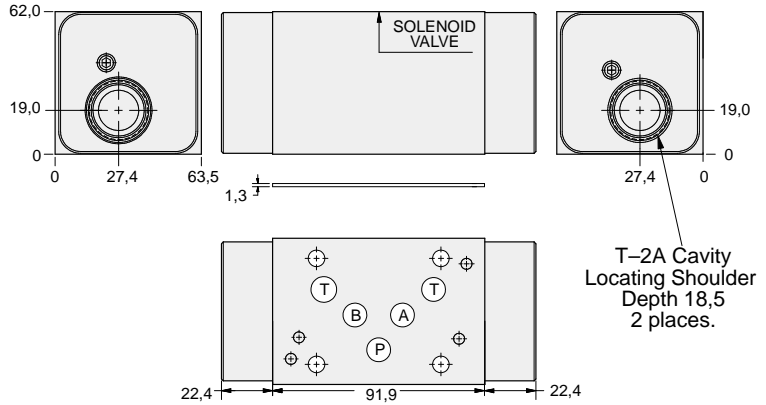

Order Retainer and Seal Kits separately.
(See Page 12.002)



ALUMINIUM		SG IRON	
Model Code	List Price	Model Code	List Price
BJY		BJY/S	

05xy REDUCING

TYPICAL CARTRIDGES USED WITH BODIES SHOWN ABOVE			
	Pilot Operated Reducing Valve		
	PBFB Page 3.06		
OTHER VALVES:			